


PT500 - PT560S



Ratings @ 0.8 PF		Prime Rating	Stand-by Rating
Voltage*¹	Frequency*²	PT 500*³	PT 560S*⁴
230/400 V	50 Hz	500 KVA	563 KVA
277/480 V	60 Hz	515 KVA	580 KVA

The above ratings represent the generating set capability guaranteed within $\pm 3\%$ at the reference conditions equivalent to those specified in ISO 8528/1.

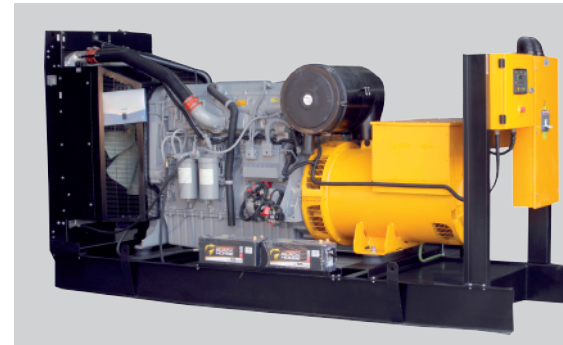

Notes

1. The applicable voltage range is 380V to 415V for 50Hz applications and 380V to 480V for 60Hz applications. For other voltage consult factory.

2. This generating set is of fixed speed of either 1500rpm or 1800rpm.

3. PT500 is the prime power rating of the generating set, where a variable load and unlimited hours usage are applied on the generating set with an average load factor of 80% of the prime rating over each 24 hour period. Noting that a 10% overload is available for 1 hour in every 12 hours operation.

4. PT560S is the standby power rating of the generating set, where a variable load limited to an annual usage up to 500 hours is applied, with 300 hours of which may be continuous running. Noting that no overload is permitted.

Certifications



- The complete Generating Set is type-tested according to ISO 8528-8 Standard.



- The control panel is certified by an ISO 17025 accredited laboratory to have IP55 according to IEC 60355



Quality ISO 9001 SAI GLOBAL

Dimensions

Length	3750 mm
Width	1120 mm
Height	2150 mm
Weight	3660 Kg

Technical Data

Engine model

Perkins 2506A-E15TAG2

Cylinders	6 - vertical in-line	
Aspiration	Turbocharged & A/A charge cooled	
Combustion	Direct injection	
Cooling System	Water cooled	
Displacement	15.2 liters	
Oil consumption	0.1 % of fuel consumption	
Lube oil capacity	62 liters	
Coolant capacity	58 liters	
Governor	Electronic	
Speed	1500 rpm	1800 rpm
Fuel Consumption @ 100% Load	100 L/H	102 L/H
Fuel Consumption @ 75% Load	76 L/H	78 L/H
Fuel Consumption @ 50% Load	53 L/H	53 L/H
Radiator Cooling Air Flow	722 m3/min	866 m3/min
Max exhaust gas flow	98 m3/min	105.3 m3/min
Emissions regulations	For unregulated territories	

The above performance data are valid as per the following specs:

- Diesel Fuel is according to BS2869 Class A2 or equivalent.
- Lubricating oil is according to API CI4 (15W/40).
- The coolant should be 50% antifreeze and 50% distilled water.

Alternator model

Leroy Somer LSA 47.2 M7

Regulation	$\pm 0.5\%$	
International protection	IP23	
Insulation class	H	
Terminals	12	
Frequency	50 Hz	60 Hz
Coolant Air flow	0.9 m3/s	1.1 m3/s